
imstk Documentation

Release 1.0.0

arikatla

May 26, 2020

User Guide

1	Introduction	2
2	Setup for Development	3
2.1	Configuration and Build	3
2.2	External Dependencies	4
3	Overview of iMSTK	5
3.1	Elements of a Scene	5
3.2	Simulation Workflow	7
4	Object Geometry	7
4.1	Analytical Geometry	7
4.2	Discrete Geometry	8
5	Rendering	9
5.1	Render Material System	9
5.2	Texture Manager	10
5.3	VTK Backend	10
5.4	Vulkan Backend	10
5.5	Lights	11
6	Collision Detection	11
7	Collision Handling	12
8	Physics	12
8.1	3D Deformable Objects	12
8.2	Cloth	13
8.3	Fluids	13
8.4	Rigid Body Dynamics	14
9	Computational Algebra	14
9.1	Direct Linear Solvers	14
9.2	Iterative Linear Solvers	14
10	External Devices	15
11	Audio	15

12 Haptic Rendering	15
13 Miscellaneous Topics	15
13.1 Object Controllers	15
13.2 Event Handling	16
13.3 File Formats	16
13.4 I/O	16
13.5 Format Check	17
13.6 Utilities	17
14 Walk-through Example	17
14.1 Bibliography	20
15 Releases	20
15.1 Release 1.0.0	20
16 Apache License	21
16.1 TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION	21
16.2 1. Definitions.	21
16.3 2. Grant of Copyright License.	22
16.4 3. Grant of Patent License.	22
16.5 4. Redistribution.	22
16.6 5. Submission of Contributions.	23
16.7 6. Trademarks.	23
16.8 7. Disclaimer of Warranty.	23
16.9 8. Limitation of Liability.	23
16.10 9. Accepting Warranty or Additional Liability.	23
16.11 APPENDIX: How to apply the Apache License to your work	23
References	24



Interactive Medical Simulation Toolkit (iMSTK)

User Documentation

1 Introduction

iMSTK is a free & open source software toolkit written in C++ that aids rapid prototyping of interactive multi-modal surgical simulations. It provides a highly modular and easy to use framework that can be extended and be interfaced with other third-party libraries for the development of medical simulators without restrictive licenses.

iMSTK supports all major platforms (MacOS, Linux, Windows) with the ability to build all the dependencies automatically using CMake. Current features include (a) support for a Vulkan and a VTK rendering backend, (b) VR support,

(c) External tracking device hardware support, (d) linear and nonlinear FEM and PBD (including fluids), (e) standard numerical solvers such as Newton, CG, Gauss-Seidel, and (e) continuous collision detection.

This documentation is designed to provide an overview of iMSTK, introductory concepts needed to comprehend the framework, its component modules and how they interact to help build simulations. For implementational level details of the modules and their classes, please refer to the code. The chapters that follow will describe details of how to build iMSTK, elements of the simulation scenario and how these elements are connected using iMSTK modular architecture followed by detailed description of each of the major modules. The final chapter includes a walk-through of the code of an all-inclusive example to help the readers to quickly build their application.

2 Setup for Development

iMSTK and its external dependencies can be configured and built from scratch Cmake to create a super-build on UNIX (MAC, Linux) and Windows platforms. The instructions below describe this process in detail.

2.1 Configuration and Build

CMake should be used to configure the project on every platform. Please refer to CMake's official [page](#) to read about how to configure using CMake.

Linux/MacOSx

Type the following commands from the same location you cloned the

```
>> mkdir iMSTK_build
>> cd iMSTK_build
>> cmake ../iMSTK      # path to source directory
>> make -j4 #to build using *4* cores
```

This will configure the build in a directory adjacent to the source directory. To easily change some configuration variables such as CMAKE_BUILD_TYPE, use ccmake instead of cmake.

One can also use Ninja for a faster build instead of Unix Makefiles. To do so, configure the cmake project with -GNinja

```
>> cmake -GNinja
>> ../iMSTK
>> ninja
```

This will checkout, build and link all iMSTK dependencies. When making changes to iMSTK base source code, you can then build from the Innerbuild directory.

Windows

Run CMake-GUI and follow the directions described on CMake's official [page](#). You need to choose which version of Visual Studio that you would like to use when configuring the project. Make sure to select Microsoft Visual Studio C++ 12 2013 or later. CMake will generate a iMSTK.sln solution file for Visual Studio at the top level. Open this file and issue build on all targets, which will checkout, build and link all iMSTK dependencies. When making changes to iMSTK base source code, you can then build from the iMSTK.sln solution file located in the Innerbuild directory.

Note: MVSC 2015 is not yet supported as the dependency libusb 1.0.20 does not support it yet. We will work on supporting MVSC in the near future when libusb 1.0.21 is released.

Options at Configure Time

Phantom Omni Support

To support the Geomagic Touch (formerly Sensable Phantom Omni) haptic device, follow the steps below:

1. Install the [OpenHaptics SDK](#) as well as the device drivers:
 - a. for [Windows](#)
 - b. for [Linux](#)
2. Reboot your system.
3. Configure your CMake project with the variable `iMSTK_USE_OMNI` set to `ON`.
4. After configuration, the CMake variable `OPENHAPTICS_ROOT_DIR` should be set to the OpenHaptics path on your system.

Vulkan Rendering Backend

To use the Vulkan renderer instead of the default VTK, follow these steps:

1. Download the [VulkanSDK](#)
2. Download your GPU vendor's latest drivers.
3. Enable the `iMSTK_USE_Vulkan` option in CMake.

Note: The examples that depend on this option being on at configure time will not build automatically if this option is not selected.

Building Examples

The examples that demonstrate the features and the usage of iMSTK API can be optionally build. Set `BUILD_EXAMPLES` to `ON` the examples needs to be built.

Virtual Reality Support

iMSTK can optionally display the render frames to the HMD instead of the default 2D screen. In order to enable VR via `openVR`, set `iMSTK_ENABLE_VR` to `ON`.

Audio Support

iMSTK has the ability to play audio streams at runtime. In order to enable Audio, set `iMSTK_ENABLE_AUDIO` to `ON`.

Uncrustify Support

iMSTK follows specific code formatting rules. This is enforced through [Uncrustify](#). For convenience, iMSTK provides the option to build uncrustify as a target. To enable this set `iMSTK_USE_UNCRUSTIFY` to `ON`.

2.2 External Dependencies

iMSTK builds upon well-established open-source libraries. Below is the list of iMSTK's external dependencies and what they are used for in IMSTK.

Library	Usage
Eigen	linear algebra (vectors, matrices, basic matrix algebra etc.)
VRPN	Interfacing with external hardware devices.
SFML	Audio support
G3log	Asynchronous logging
Google Test	Unit testing
OpenVR	HMD-based Virtual reality support
SCCD	Continuous collision detection
Uncrustify	Enforcing code formatting
VEGAFem	Rendering, visualization and filters
VTK	Finite element support

Secondary external dependencies include *glfw*, *gli*, *glm*, *LibNiFalcon*, *Linusb*, and *PThread*.

3 Overview of iMSTK

3.1 Elements of a Scene

In iMSTK, a collection of ‘scene objects’, their interaction graph and inanimate entities like (lights, camera etc.) form a scene. Scene objects are defined with internal states (eg: displacements, temperature) that may be governed by a mathematical law. The interaction between the scene objects is specified by a collision detection and collision handling. The interaction laws are encoded in the collision handling.

Module

A iMSTK module facilitates execution of a set callback function in a separate thread. Any simulation related logic is executed via one module or the another. For example, the devices often require a separate thread for I/O which will be facilitated through the `imstkModule` class. At any given instance in time, a module can be in one of the following states:

1. STARTING
2. RUNNING
3. PAUSING
4. PAUSED
5. TERMINATING
6. INACTIVE

the module also allows specifying custom function callbacks that will be called at the start or end of the execution frame. The examples demonstrate the usage of these callbacks.

Simulation Manager

The simulation manager is a high-level class that drives the entire simulation. Some of the functionalities of the simulation manager include:

1. Addition and removal of a scene
2. Execution control of a currently active scene: *Start*, *Run*, *Pause*, *Reset*, *End*

3. Setting active scene
4. Adding and remove modules (run in separate threads)
5. Starting the renderer

The simulation manager can be configured to run in ‘simulation backend mode’ where the rendering is disabled.

Scene Manager

The scene manager is a module (which runs in a different thread) that executes each frame of the simulation in the scene on-demand. Each frame is triggered by the simulation manager. The simulation workflow described below is implemented in the `runModule()` function of the `sceneManager`.

Scene Objects

The scene object encapsulates an individual actor that has an internal state which is governed by a mathematical formulation (*force model* described later). The internal state (eg: deformation field, temperature) exists over a finite geometry; therefore each scene object contains geometric representations for *visual*, *collision* and the *physics* modules to utilize. The geometric representations could be the same or separate (for example one might want to do collisions on coarser geometric representations while the physics is resolved on a denser representation) for these three modules. The geometric representation can be a collection of points with or without connectivity or even a standard shape.

Geometry Mappers

The consistency between the visual, collision and the physics geometric representations is maintained using geometry mappers. At any given simulation frame, all the internal states are updated, collisions are computed, interactions are resolved and the new states are passed via mappers to the renderer to update the visuals. `iMSTK` provides standard mappers to map for example, displacement from volumetric mesh the displayed mesh which is a surface. Arbitrary custom mappers can be defined by the user.

Collision Graph

The interaction graph describes the interaction between the scene objects. Below is a sample code to describe the interaction between an elastic body and a rigid sphere using penalty-based collision response and *PointSetToSphere* collision detection.


```
// Create a collision graph
auto graph = scene->getCollisionGraph();
auto pair = graph->addInteractionPair(elastibBody,
                                     Sphere,
                                     CollisionDetection::Type::PointSetToSphere,
                                     CollisionHandling::Type::Penalty,
                                     CollisionHandling::Type::None);
```

Note: In cases where both the objects are deformable, collision response can be prescribed both ways. More details on the collision detection and response can be found in their respective sections later.

Inanimate Scene Elements

Background elements of the scene that are not necessarily visible or affect the simulation are the lights and camera. They are described in detail in the rendering section.

3.2 Simulation Workflow

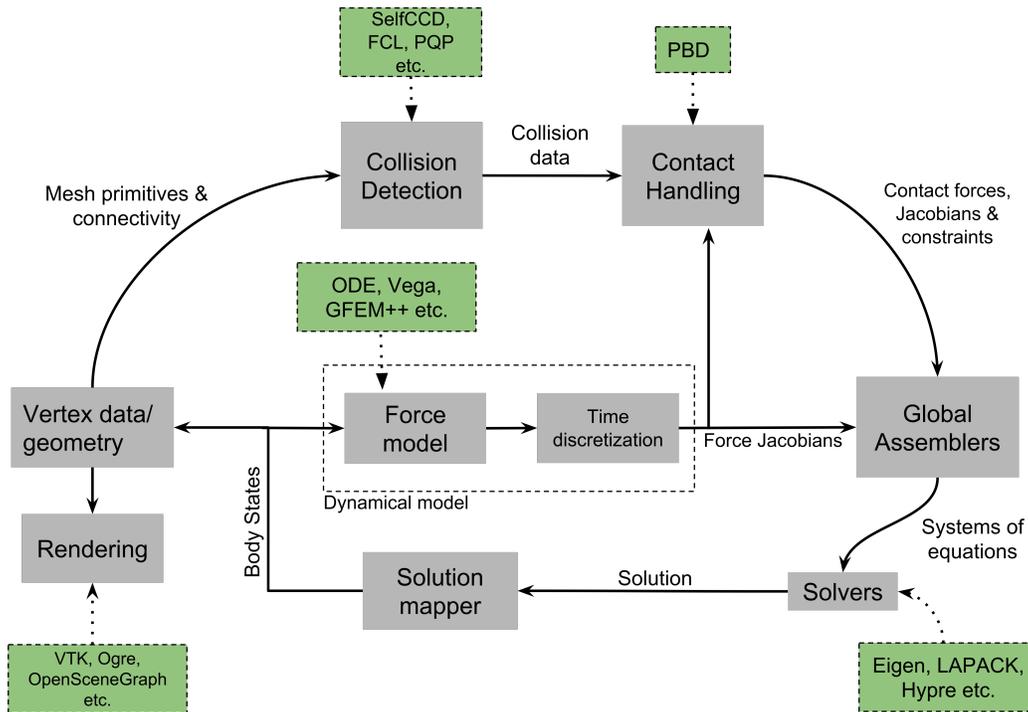

The flowchart above shows the brief overview of the simulation workflow. At any given frame the force vectors and the Jacobian matrices are computed and passed on to the assembly. The collision detection computes the intersecting scene objects based on the latest configuration available from and the collision data is passed to the contact handling module. Depending on the type of contact handler either the forces or constraints based are passed to the assembler. The assembled assembles the discrete set of equations that will be solved by the solver chosen. Once the solution is obtained the geometry mappers deconstruct this and update the visual geometries. The mappers further update the physics and collision mesh representations (if they happen to be different). This is continued until the user terminates or pauses the simulation.

4 Object Geometry

iMSTK handles a wide variety of geometric types that will be used for visual representations of the scene objects, collision computations or as input domain for physics formulations. The geometry is broadly classified as (a) Analytic (parameterized) and (b) Discrete geometry.

4.1 Analytical Geometry

Analytic geometry represents standard shapes that can be fully specified few parameters. iMSTK supports the following 3D shapes.

- **Sphere:** Specified by radius and center
- **Cube:** Specified by length of the side and the center
- **Plane:** Specified by normal and any point on a plane
- **Capsule:** Specified by radius, length (between the centers of end planes of the cylindrical section) and position (of the center of the cylinder)
- **Cylinder:** Specified by the radius, length and the position (of the center of the cylinder)

The default position is (0,0,0) and the defaulted to unit length along the cylinder axis. For rendering purposes, the internal representation of the above shapes is mapped to the VTK data structures.

4.2 Discrete Geometry

Discrete geometry is where a shape is represented by a collection of primitives such as points, triangles, tetrahedron, hexahedron etc. iMSTK currently supports, point clouds, surface mesh, and unstructured volumetric meshes composed of tetrahedral primitives.

Surface Mesh


Surface meshes consist of vertices and triangles. The vertices contain information such as position, normals, UV coordinates, and tangents. Each triangle contains the index of the three vertices. Surface mesh normals consider UV seams so that when deformation occurs, the normals look smooth even when the vertices are duplicated.

Volumetric Mesh

The volumetric mesh is composed of vertices and tetrahedral elements. The vertices can also hold additional scalar data for visualization purposes.

Decals (Vulkan only)

This geometry type actually consists of two related classes: decals and decal pools. A **decal** a unique object that can project onto underlying opaque geometry. The projection is along the Z-axis. A **decal pool** is a collection decals. Memory is preallocated ahead of time on the GPU side to support additional decals.

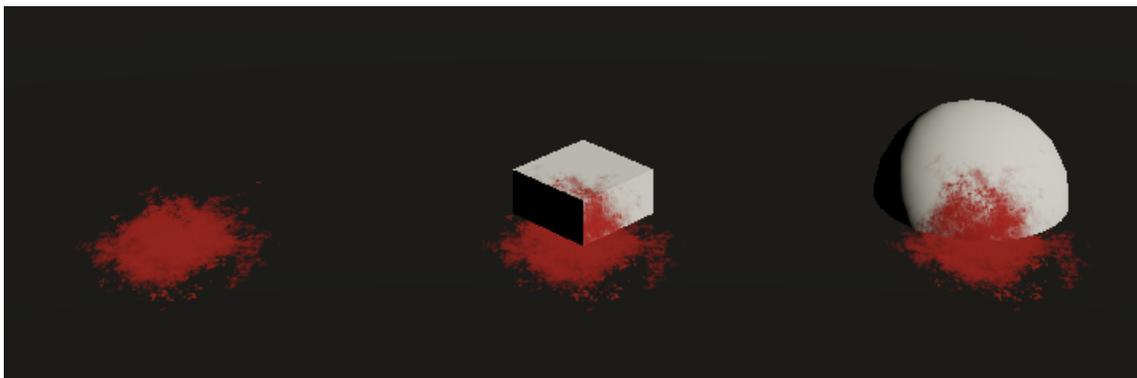

In terms of how the decals are rendered, decals are instanced and share the same material. Therefore, materials should only be assigned to the decal pool, rather than the decal. This makes a decal pool a relatively heavy object while decals are lightweight. Decals blend to the layer underneath, inheriting their normals, meaning that normal maps will not work. Unlike opaque geometry, decals are only rendered once and cannot cast shadows.

Decals have a projection box that is by default one meter in each direction. This can be scaled by setting the scale of each decal. Opaque geometry that intersects this box will have the decal’s material projected onto it. If the decal is parallel to a surface, then the projection will look severely stretched. To avoid this, rotate the decal by a small amount. If the decal is facing the wrong direction, then it will be invisible.

5 Rendering

iMSTK rendering is powered by two rendering APIs: VTK (default) and Vulkan.

5.1 Render Material System

A render material holds information on the appearance of an item. This information includes:

- Textures
- Display modes (such as wireframe)
- Values (such as roughness)
- Shader details

Although a material is a higher level abstraction, it has a large impact on performance.

The materials properties that are available in iMSTK are described below along with their definitions:

Property	Definition
Roughness	VTK: influences how smooth a surface is for Blinn-Phong. This doesn’t have a precise physical meaning. Vulkan: influences roughness. This value is actually squared to allow for more precision for lower roughness values. This has a precise physical meaning.
Metalness	VTK: influences specular color. Vulkan: has a physical meaning, influencing both the specular color and Fresnel strength.
SSS	Vulkan: influences the radius and strength of the subsurface scattering post-processing pass.
Tessellation	Vulkan: currently tessellates the mesh



5.2 Texture Manager

The texture manager caches textures already in use. Generally most of the GPU memory in use by the application will be consumed by textures, so it's important to avoid redundantly uploading textures. The texture manager currently uses multiple parameters to detect redundancy including file path and texture type. It's possible for the same image file to be loaded more than once if it's used in different ways (e.g., using the same image for roughness and albedo). This is by design because different types of texture can be optimized in different image formats to save space.

5.3 VTK Backend

The VTK backend is provided to allow for advanced visualization features for debugging and visualization application behavior such as physics.

5.4 Vulkan Backend

The Vulkan backend concentrates on photorealistic graphics and uses more much aggressive/expensive approaches to achieve this goal. Currently, the Vulkan backend follows concepts from physically-based rendering (PBR). This doesn't have a clear definition, but the route taken by the Vulkan backend consists of:

- Linear color space
- Microfacet specular BRDF with energy conservation
- High dynamic range with filmic tonemapping

- Post processing that operates based on more physical values

5.5 Lights

Note: The intensity of the light can exceed 1.0, which gets clamped in the VTK backend but is smoothed in the Vulkan backend due to the tonemapping. Thus, the resulting appearance will be different.

Directional Lights

Directional lights have a direction, an intensity, and a color. In the Vulkan renderer, they can also cast shadows.

Point Lights

Point lights have a position, an intensity, and a color. Light rays are calculated coming out from the center of the point light.

Spot Lights

Spot lights are a special case of point lights that also have an angle cut off along a certain direction.

Image-Based Lighting (Vulkan only)

Image-based lighting (IBL) allows the scene to be illuminated by a surrounding light source. This can be used in the Vulkan backend. To use it, a global IBL probe object must be created and assigned to the scene. The object takes three textures: an irradiance cubemap, a radiance cubemap, and a BRDF lookup table. The two cubemap textures must be in DDS format, and should also use high-dynamic range for the best results. The radiance cubemap in particular should be mipmapped.

6 Collision Detection

Collision detection (CD) is the process of detecting collision between two geometrical shapes. The geometrical shapes, as explained earlier, can be represented as a collection of one or more primitives (eg: points, lines and triangles). Therefore, the CD determines the collision between two sets of primitives. The collision data that is produced as a result of the collisions is passed on to the collision handling module. Any collision detection algorithm results in one or more of the following data types:

- VertexTriangleCollisionData
- EdgeEdgeCollisionData
- MeshToAnalyticalCollisionData
- PointTetrahedronCollisionData
- PickingCollisionData

iMSTK currently supports analytical geometry to mesh and inter mesh collision detection. Continuous collision detection (CCD) is made available in imstk through selfCCD library. CCD algorithm extends the collision in time thereby capturing the collisions otherwise missed by the traditional collision detection algorithms.

7 Collision Handling

Collision handling determines what needs to be done in the event of collision. The collision data obtained from the CD module is used to either compute the response forces or generate constraints that will be solved along with the internal forces. iMSTK currently supports penalty, linear projection constraints, PBD collision constraints, virtual coupling and picking collision handling.

8 Physics

iMSTK is designed to accommodate varied physics-based formulations that govern the internal states ascribed to the scene objects. The architecture is designed in such a way that different physical modalities such as 3D elastic objects, fluids (such as liquids and smoke), thin elastic sheets, elastic strings can be accommodated with the choice of different formulations for each modality.

Modality	Formulation	Usage
3D Elastic object	FE SPH Meshless	Tissue Generic elastic solids
Fluids	Finite Volume SPH PBD	Blood Smoke
Elastic objects in 3D with 2D topology	PBD FE	Thin tissue layers Cloth-like objects in skill trainers
Elastic objects 3D with 1D topology	PBD FE	Suture thread
Other: Heat diffusion, electric potential	FE	Use of energy in surgery

The table above lists various modalities, physics based formulations that help realized them and their potential usage in medical simulations. While the architecture itself allows extension to most modalities and their formulations, only a subset of them are currently available in iMSTK.

In iMSTK, the partial differential equations that describes the evolution of the physical quantities both in space and time are modeled using dynamicalModel class. The dynamical model is composed of the *internal force* model and the *time stepping* scheme which are designed to take in the current internal states and produce force (analogous) vector and Jacobian matrices to be used by the solvers.

8.1 3D Deformable Objects

iMSTK supports elastic solids both using finite element (FE) and PBD. FE support is only limited to tetrahedral elements while the PBD formulation is agnostic to the underlying mesh.

```
auto dynaModel = std::make_shared<FEMDeformableBodyModel>();  
dynaModel->configure(iMSTK_DATA_ROOT"/asianDragon/asianDragon.config");  
dynaModel->setTimeStepSizeType(TimeSteppingType::realTime);  
dynaModel->setModelGeometry(volTetMesh);  
  
// Create and add Backward Euler time integrator  
auto timeIntegrator = std::make_shared<BackwardEuler>(0.001);  
  
dynaModel->setTimeIntegrator(timeIntegrator);
```

FE dynamical model can be configured by using an external configuration file. The configuration file specifies (a) an external file listing the IDs of the nodes that are fixed, (b) density, (c) Damping coefficients, (d) elastic modulus, (e) Poisson's ratio, (f) the choice of FE formulation available. The formulation that are available are (i) Linear (ii) Co-rotation (iii) invertable (iv) Saint-Venant Kirchhoff. Currently backward Euler is the only time stepping that is available in iMSTK.

Below is a sample code that shows the configuration of an elastic object with PBD formulation.

```
auto deformableObj = std::make_shared<PbdObject>("Beam");
auto pbdModel = std::make_shared<PbdModel>();
pbdModel->setModelGeometry(volTetMesh);
pbdModel->configure(/*Number of Constraints*/ 1,
                  /*Constraint configuration*/ "FEM StVk 100.0 0.3",
                  /*Mass*/ 1.0,
                  /*Gravity*/ "0 -9.8 0",
                  /*TimeStep*/ 0.01,
                  /*FixedPoint*/ "51 127 178",
                  /*NumberOfIterationInConstraintSolver*/ 5);
```

Note that unlike FE, for the case of PBD formulation, the choice of time stepping scheme and solver is restricted in choice resulting in a compact API to prescribe the entirety of the object configuration.

8.2 Cloth

Currently iMSTK supports the thin elastic sheets like cloth via PBD formulation which are governed by *distance* and *dihedral* constraints. The code below demonstrates the initialization of the PbdModel and its configuration.

```
auto deformableObj = std::make_shared<PbdObject>("Cloth");
auto pbdModel = std::make_shared<PbdModel>();
pbdModel->setModelGeometry(surfMesh);
pbdModel->configure(/*Number of constraints*/ 2,
                  /*Constraint configuration*/ "Distance 0.1",
                  /*Constraint configuration*/ "Dihedral 0.001",
                  /*Mass*/ 1.0,
                  /*Gravity*/ "0 -9.8 0",
                  /*TimeStep*/ 0.03,
                  /*FixedPoint*/ "1 2 3 4 5 6 7 8 9 10 11",
                  /*NumberOfIterationInConstraintSolver*/ 5);
deformableObj->setDynamicalModel(pbdModel);
deformableObj->setVisualGeometry(surfMesh);
deformableObj->setPhysicsGeometry(surfMesh);
```

The dihedral constraints require that the mesh supplied is a surface mesh. Note that for the PBD formulation the number of iterations of the solver can determine the eventual stiffness exhibited by the cloth.

8.3 Fluids

Fluids (in this case liquids) are supported in iMSTK via PBD. Constant density constraints are solved within the PBD solution framework in order to achieve the fluid flow. The formulation operates on a set of points.

```
auto deformableObj = std::make_shared<PbdObject>("Dragon");
deformableObj->setVisualGeometry(fluidMesh);
deformableObj->setCollidingGeometry(fluidMesh);
deformableObj->setPhysicsGeometry(fluidMesh);
auto pbdModel = std::make_shared<PbdModel>();
```

(continues on next page)

(continued from previous page)

```
pbModel->setModelGeometry(fluidMesh);
pbModel->configure(/*Number of Constraints*/ 1,
                 /*Constraint configuration*/ "ConstantDensity 1.0 0.3",
                 /*Mass*/ 1.0,
                 /*Gravity*/ "0 -9.8 0",
                 /*TimeStep*/ 0.005,
                 /*FixedPoint*/ "",
                 /*NumberOfIterationInConstraintSolver*/ 2,
                 /*Proximity*/ 0.1,
                 /*Contact stiffness*/ 1.0);
deformableObj->setDynamicalModel(pbdModel);
```

8.4 Rigid Body Dynamics

The rigid body dynamics is made available in iMSTK through ODE. Below is the code to configure the rigid body dynamical model and assign it to an object described in 3D by a surface geometry.

```
auto rigidObject = std::make_shared<RigidObject>("RigidObject");
rigidObject->setVisualGeometry(surfaceMesh);
rigidObject->setCollidingGeometry(surfaceMesh);
rigidObject->setPhysicsGeometry(surfaceMesh);
auto rigidBodyModel = std::make_shared<RigidBodyModel>();
rigidBodyModel->configure(false, surfaceMesh, 1.0);
rigidObject->setDynamicalModel(rigidBodyModel);
scene->addSceneObject(rigidObject);
```

9 Computational Algebra

9.1 Direct Linear Solvers

iMSTK provides interface to all the direct solvers (based on dense and sparse matrices) that Eigen provide. They are: (a) LU factorization, (b) LDLT, (c) QR factorization, (d) Cholesky factorization.

9.2 Iterative Linear Solvers

iMSTK also provides access to Eigen's iterative solvers like Conjugate Gradient and Gauss Seidel. In addition, the following custom solvers are available:

1. **Modified conjugate gradient (MCG):** Solves linear system of equations with the symmetric positive definite system matrix along with orthogonal linear projection constraints [mcg].
2. **Modified Gauss-Seidel:** Similar to modified MCG but solves the linear system by projecting the constraints node-wise at each iteration.
3. **PBD solver:** Position based dynamics [pbd] formulation generates a list of heterogeneous non-linear set of constraints that need to be solved using nonlinear Gauss-Seidel. PBD solver implements this solution.

10 External Devices

Most surgical simulators require the users to interact with the software using a hardware interface. For this purpose, iMSTK uses VRPN library [vrpn] to interface with wide number of hardware devices. Currently, iMSTK supports a subset of these devices, specifically, Novint Falcon, Geomagic Touch, OSVR, Arduino, 3D Connexion Navigator and 3D Connexion Space Explorer.


11 Audio

Simulation of some surgical scenarios require reproduction of the sounds produced during surgery. iMSTK provides the capability to do so via SFML library [sfml]. Features include ability to configure the position of the sound source, position of the listener, attenuation coefficients, sound pitch. Please refer to audio example for details.

Note: Currently, in order to enable the audio capability, `iMSTK_AUDIO_ENABLED` has to be set to ON at CMake configure time.

12 Haptic Rendering

Many medical simulations involve the surgeon feeling the force feedback from the organs through the surgical tools. The ability to allow for algorithms to reproduce this is crucial for the framework. iMSTK currently supports GeoMagic Touch and Novint Falcon devices for force rendering.

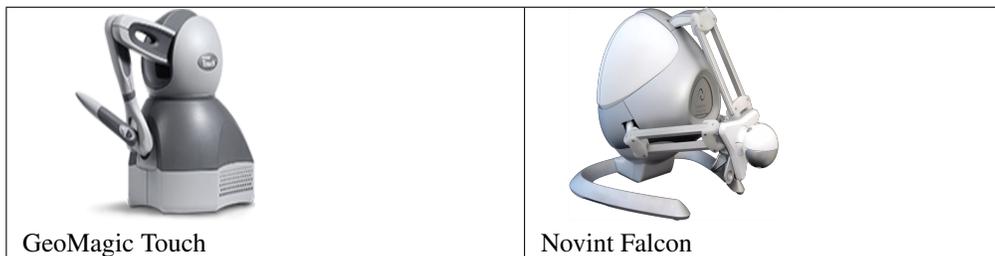

An example code on how to instantiate a haptic device is shown below

```
// Create Device Client
auto client = std::make_shared<HDAPIClient>("Phantom1");

// Create Device Server
auto server = std::make_shared<HDAPIServer>();
server->addDeviceClient(client);
sdk->addModule(server);
```

13 Miscellaneous Topics

13.1 Object Controllers

The scene objects in the scene can be controlled in real-time by the user through user inputs such as keyboard inputs or movement of the end effector of one of the supported devices. This feature becomes handy for surgical scenarios

where the surgical tools are controlled by the user movements.

imstkSceneObject controller class implements this feature. Given a scene object and the device tracker, object control can be instantiated by the following statement

```
auto controller = std::make_shared<SceneObjectController>(object, trackCtrl);
scene->addObjectController(controller);
```

At runtime, the scene object's pose (position and orientation) will be set to that of the device tracker. In addition, imstk provides a utility class for two-jawed laparoscopic tool. Its usage can be found in *LaparoscopicToolController* example. In addition, a *DummyClient* class allows for external program to provide the updated pose. This is especially useful when imstk is used as an external library where the main program handles the device control.

13.2 Event Handling

Currently, the events are handled in imstk using three different mechanisms which will be unified in the future. Standard key press and mouse events are handled in iMSTK via VTK's interactor style. Currently pan-zoom-rotate via input from the mouse is achieved through this mechanism. Below is the example of setting a custom callback linked to press of a key

```
.. // Create a call back on key press of 'b' to take the screen shot"
viewer->setOnCharFunction('b', [&](InteractorStyle\* c) -> bool
{
    screenshotUtility->saveScreenShot();
    return false;
});
```

Any event triggered by non-standard external devices (eg: foot pedal) is implemented in collision handling or via lambda mechanism of the imstk Module.

13.3 File Formats

iMSTK handles a range of file formats for various types of media.

- **Surface/Volumetric Meshes:** .fbx, .dae, .obj, .stl, .3ds, .ply, .vtk, .vtu
- **Texture Formats:** .png, .jpg, .bmp, .dds (for Vulkan cubemaps)
- **Configuration Files:** .config (from vega)
- **Misc.:** .bou (boundary condition files)

13.4 I/O

The file I/O is handled by MeshIO module. Any file format can be loaded using a simple call shown below.

```
auto objMesh = MeshIO::read(iMSTK_DATA_ROOT"/asianDragon/asianDragon.obj");
auto plyMesh = MeshIO::read(iMSTK_DATA_ROOT"/cube/cube.ply");
auto stlMesh = MeshIO::read(iMSTK_DATA_ROOT"/cube/cube.stl");
auto vtkMesh = MeshIO::read(iMSTK_DATA_ROOT"/cube/cube.vtk");
auto vegaMesh = MeshIO::read(iMSTK_DATA_ROOT"/cube/cube.veg");
```

Please refer to MeshIOExample for more details on the usage. Currently imstk do not support file output.

13.5 Format Check

iMSTK has a set of guidelines for code style formatting and is enforced automatically using *uncrustify* external library. The check for the code style is embedded on the unit tests. However, in order to make it convenient for the developed, *uncrustify_Run* project get shipped and build at the time of building iMSTK. Running the executable from the project will modify the code to enforce the code style.

13.6 Utilities

Imstk captures commonly used code patterns inside the utilities in order to reduce the amount of code in the application and to quickly create a working application.

API utilities

The namespace `imstk::APIUtilities` contains utility functions that allows for quick creation and configuring of scene objects.

```
createVisualAnalyticalSceneObject(imstk::Geometry::Type type,
                                  std::shared_ptr<imstk::Scene> scene,
                                  const std::string objName,
                                  const double scale = 1.,
                                  const imstk::Vec3d t(0.,0.,0.));
```

Above is a declaration of a utility function that allows creation and do initial transform of any analytical object (that is visual only) in one call. Additional utilities include (a) creation of a colliding scene object that is represented by analytic geometry, (b) an utility to create a nonlinear system, and (c) an utility to print the framerate of the simulation into the standard output window.

More utilities will be added in the future when different usage patterns are identified.

14 Walk-through Example

This chapter walks through an example scene where a tool controlled by the user through the use of a haptic device interacts with a deformable object (finite element based).

Step 1: Instantiating a simulation manager and setting up the scene

```
auto sdk = std::make_shared<SimulationManager>();
auto scene = sdk->createNewScene("LiverToolInteraction");
scene->getCamera()->setPosition(0, 2.0, 40.0);
```

Step 2: Loading model data from a file

```
auto tetMesh =
imstk::MeshIO::read(imstk::DATA_ROOT"/oneTet/oneTet.veg");

if (!tetMesh)
{
    (WARNING) << "Could not read mesh from file.";
    return 1;
}
```

Step 3: Extracting the surface mesh that is needed for rendering

```

auto surfMesh = std::make_shared<imstk::SurfaceMesh>();
auto volTetMesh = std::dynamic_pointer_cast<imstk::TetrahedralMesh>(tetMesh);

if (!volTetMesh)
{
    LOG(WARNING) << "Dynamic pointer cast from imstk::Mesh to
    imstk::TetrahedralMesh failed!";

    return 1;
}

volTetMesh->extractSurfaceMesh(surfMesh);

```

Step 4: Creating a mapping between the volume and surface mesh

```

auto oneToOneNodalMap = std::make_shared<imstk::OneToOneMap>();
oneToOneNodalMap->setMaster(tetMesh);
oneToOneNodalMap->setSlave(surfMesh);
oneToOneNodalMap->compute();

```

Step 5: Setting up the dynamic model that will be used in the scene

```

auto dynaModel = std::make_shared<FEMDeformableBodyModel>();
dynaModel->configure(iMSTK_DATA_ROOT"/oneTet/oneTet.config");
dynaModel->initialize(volTetMesh);

// Create and add Backward Euler time integrator
auto timeIntegrator = std::make_shared<BackwardEuler>(0.001);

dynaModel->setTimeIntegrator(timeIntegrator);

```

Step 6: Creating a deformable object and adding it to the scene

```

auto deformableObj = std::make_shared<DeformableObject>("Dragon");
deformableObj->setVisualGeometry(surfMesh);
deformableObj->setPhysicsGeometry(volTetMesh);
deformableObj->setPhysicsToVisualMap(oneToOneNodalMap); //assign the computed map
deformableObj->setDynamicalModel(dynaModel);
deformableObj->initialize();
scene->addSceneObject(deformableObj);

```

Step 7: Creating a nonlinear system

```

auto nlSystem = std::make_shared<NonLinearSystem>(dynaModel->getFunction(),
                                                dynaModel->getFunctionGradient());

std::vector<LinearProjectionConstraint> projList;

for (auto i : dynaModel->getFixNodeIds())
{
    auto s = LinearProjectionConstraint(i, false);
    s.setProjectorToDirichlet(i);
    s.setValue(Vec3d(0.001, 0, 0));
    projList.push_back(s);
}

nlSystem->setLinearProjectors(projList);

```

(continues on next page)

(continued from previous page)

```
nlSystem->setUnknownVector(dynaModel->getUnknownVec());
nlSystem->setUpdateFunction(dynaModel->getUpdateFunction());
nlSystem->setUpdatePreviousStatesFunction(dynaModel->getUpdatePrevStateFunction());
```

Step 8: Creating a linear solver and adding it to the nonlinear system

```
// create a linear solver
auto cgLinSolver = std::make_shared<ConjugateGradient>();

// create a non-linear solver and add to the scene
auto nlSolver = std::make_shared<NewtonSolver>();

nlSolver->setLinearSolver(cgLinSolver);
nlSolver->setSystem(nlSystem);
//nlSolver->setToFullyImplicit();
scene->addNonlinearSolver(nlSolver);
```

Step 9: Setting up the haptics interface

```
// Device clients
auto client = std::make_shared<imstk::HDAPIDeviceClient>("Default Device");

// Device Server
auto server = std::make_shared<imstk::HDAPIDeviceServer>();

server->addDeviceClient(client);

sdk->addModule(server);
```

Step 10: Creating tool-related scene objects and adding them to the scene

```
// Load tool mesh from a file
auto pivot = apiutils::createAndAddVisualSceneObject(scene,
                                                    iMSTK_DATA_ROOT"/laptool/pivot.
↪obj",
                                                    "pivot");

// Or analytical object
auto sphere0Obj = ↪
↪apiutils::createCollidingAnalyticalSceneObject(imstk::Geometry::Type::Sphere,
                                                    scene,
                                                    "Sphere0",
                                                    3,
                                                    Vec3d(1, 0.5, 0));
auto trackingCtrl = std::make_shared<imstk::DeviceTracker>(client);

auto lapToolController = std::make_shared<imstk::SceneObjectController>(sphere0Obj,
                                                                           trackingCtrl);

scene->addObjectController(lapToolController);
```

Step 11: Creating the collision interaction graph

```
scene->getCollisionGraph()->addInteractionPair(deformableObj,
                                                sphere0Obj,
                                                CollisionDetection::Type::MeshToSphere,
```

(continues on next page)

(continued from previous page)

```
CollisionHandling::Type::Penalty,  
CollisionHandling::Type::None);
```

Step 12: Setting up camera parameters in the scene (if necessary)

```
// Set Camera configuration  
auto cam = scene->getCamera();  
  
cam->setPosition(imstk::Vec3d(0, 20, 20));  
cam->setFocalPoint(imstk::Vec3d(0, 0, 0));
```

Step 13: Running the simulation

```
sdk->setCurrentScene(scene);  
sdk->startSimulation(true);
```

14.1 Bibliography

15 Releases

15.1 Release 1.0.0

Announcement: iMSTK 1.0.0

We are introducing Interactive Medical Simulation Toolkit (iMSTK)-a free & open source software toolkit written in C++ that aids rapid prototyping of interactive multi-modal surgical simulations.

For more information, visit our website: <http://www.imstk.org/>

Features

- Cross-platform build
- CMake automated superbuild
- Test infrastructure (via google test)
- Continuous Integration
- Scene and simulation management
- Vulkan and VTK rendering backends
- Advanced rendering: Physically based rendering, Subsurface scattering, Decals, Shadows,
- Graphical overlays (Vulkan backend only)
- Standard user controls (pause, run, exit, pan-zoom-rotate)
- SteamVR support including (Oculus, HTC Vive (VTK backend only)
- Finite elements (linear, co-rotational, non-linear formulations)
- Position based dynamics
- Penalty and constraint-based collision handling
- Linear solvers: Direct and Iterative matrix solvers
- Non-linear Newton solver

- Collision detection (CCD, Spatial hash based collision, narrow phase queries)
- External device support (VRPN)
- Support for standard mesh input formats (.obj, .dae, .fbx., .stl, .vtk, .vtu, etc.)
- Asynchronous logging (using g3log)
- Audio support
- Haptic rendering (OpenHaptics)

Contributors for this release

Venkata Sreekanth Arikatla, Alexis Girault, Nicholas Boris Milef, Ricardo Ortiz, Thien Nguyen, Rachel Clipp, Mohit Tyagi, Samantha Horvath, Jean-Baptiste Vimort, Sean Radigan, David Thompson, Dženan Zukić, Mayeul Chassagnard, Tansel Halic, Hina Shah, Andinet Enquobahrie, Hong Li, Shusil Dangi

16 Apache License

Version 2.0

Date January 2004

URL <http://www.apache.org/licenses/>

16.1 TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

16.2 1. Definitions.

“**License**” shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

“**Licensor**” shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

“**Legal Entity**” shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, “control” means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

“**You**” (or “**Your**”) shall mean an individual or Legal Entity exercising permissions granted by this License.

“**Source**” form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

“**Object**” form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

“**Work**” shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

“**Derivative Works**” shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

“**Contribution**” shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner.

For the purposes of this definition, “submitted” means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as “Not a Contribution.”

“Contributor” shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

16.3 2. Grant of Copyright License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

16.4 3. Grant of Patent License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

16.5 4. Redistribution.

You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- You must give any other recipients of the Work or Derivative Works a copy of this License; and
- You must cause any modified files to carry prominent notices stating that You changed the files; and
- You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License. You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

16.6 5. Submission of Contributions.

Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

16.7 6. Trademarks.

This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

16.8 7. Disclaimer of Warranty.

Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an **“AS IS” BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND**, either express or implied, including, without limitation, any warranties or conditions of **TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE**. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

16.9 8. Limitation of Liability.

In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

16.10 9. Accepting Warranty or Additional Liability.

While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

16.11 APPENDIX: How to apply the Apache License to your work

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets “[]” replaced with your own identifying information. (Don’t include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same “printed page” as the copyright notice for easier identification within third-party archives.

Copyright 2018 iMSTK

Licensed under the Apache License, Version 2.0 (the "License");
you may **not** use this file **except in** compliance **with** the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law **or** agreed to **in** writing, software
distributed under the License **is** distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express **or** implied.
See the License **for** the specific language governing permissions **and**
limitations under the License.

References

- [mcg] Uri M. Ascher and Eddy Boxerman. 2003. On the modified conjugate gradient method in cloth simulation. *Vis. Comput.* 19, 7-8 (December 2003), 526-531.
- [pbd] Matthias Müller, Bruno Heidelberger, Marcus Hennix, and John Ratcliff. 2007. Position based dynamics. *J. Vis. Comun. Image Represent.* 18, 2 (April 2007), 109-118.
- [vrpn] Russell M. Taylor, II, Thomas C. Hudson, Adam Seeger, Hans Weber, Jeffrey Juliano, and Aron T. Helser. 2001. VRPN: a device-independent, network-transparent VR peripheral system. In *Proceedings of the ACM symposium on Virtual reality software and technology (VRST '01)*. ACM, New York, NY, USA, 55-61.
- [sfml] Simple and Fast Multimedia Library: <https://github.com/SFML/SFML>